

# PowerSorb™ 1130 UV Absorber

## Introduction

PowerSorb™ 1130 is a liquid UV absorber of the hydroxyphenyl-benzotriazole class specifically developed for coatings. It dissolves in most common solvents and is soluble in waterborne systems.

## Chemical Name

Mix.  $\alpha$ -[3-[3-(2H-benzotriazol-2-yl)-5-(1,1-dimethylethyl)-4-hydroxyphenyl]-1-oxopropyl]- $\omega$ -hydroxypoly(oxo-1,2-ethanediyl);  $\alpha$ -[3-[3-(2H-benzotriazol-2-yl)-5-(1,1-dimethylethyl)-4-hydroxyphenyl]-1-oxopropyl]- $\omega$ -[3-[3-(2H-benzotriazol-2-yl)-5-(1,1-dimethylethyl)-4-hydroxyphenyl]-1-oxopropyl] poly(oxo-1,2-ethanediyl); Polyethyleneglycol 300



## CAS Number

104810-48-2 + 104810-47-1 + 5322-68-3

## EINECS Number

600-603-4 + 600-602-9 + 25322-68-3

## Chemical Structure

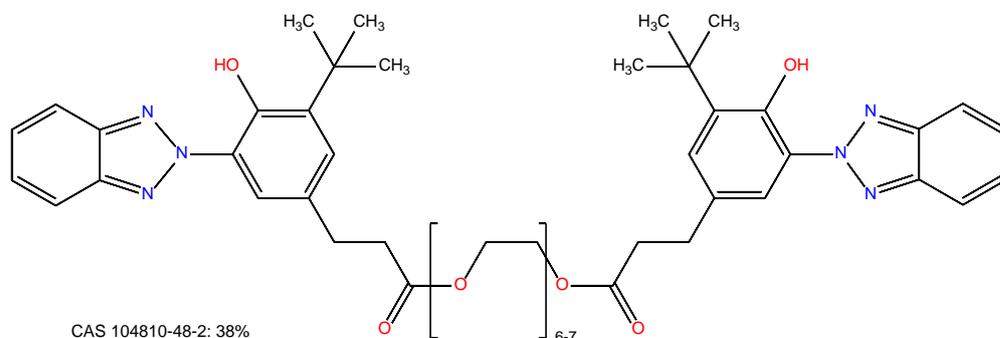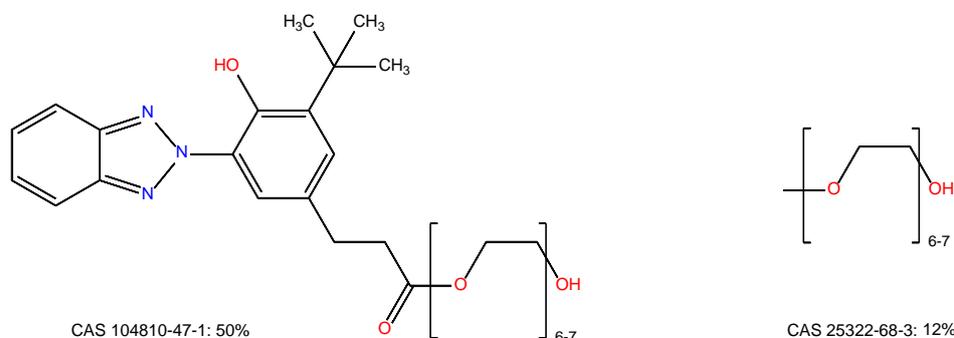

## Physical Properties

Appearance	Yellow to light amber liquid
------------	------------------------------

## PowerSorb™ 1130 UV Absorber

Melting Point (°C)	73-77
Density (20°C, g/cm <sup>3</sup> )	1.17
Viscosity (20°C, mPa·s)	7400
Color of Solution (460nm, %)	Min.95
Color of Solution (500nm, %)	Min.97
Concentration	50 ± 4%, CAS 104810-48-2 38 ± 3%, CAS 104810-47-1 12 ± 1.5%, CAS 25322-68-3

### Solubility

Solubility [20°C]	% w/w
Butyl carbitol	>50
Butanol	>50
Butyl Acetate	>50
Ethyl Glycol	>50
Hexane Dioldiacrylate	>50
MEK	>50
Trimethylol propane triacrylate	>50
Xylene	>50
Water	<0.01

### Benefits & Applications

PowerSorb™ 1130 is especially suitable for industrial and automotive coatings with its high temperature and extraction resistance.

PowerSorb™ 1130 also provides efficient protection to light sensitive substrates, such as wood and plastics due to its broad UV absorption.

PowerSorb™ 1130 is used with HALS in plastics and coatings to protect water and solvent based coatings. The amount required for optimal performance should be determined in trials covering a concentration range.

### Handling & Storage

In accordance with good industrial practice, handle with care and avoid unnecessary personal contact. Avoid continuous or repetitive breathing of dust. Use only with adequate ventilation. Protect skin. Avoid dust formation and ignition sources.

## PowerSorb™ 1130 UV Absorber

This product may be stored up to one year in a sealed container. Containers should be stored in a cool, dry area. Extended storage at elevated temperatures or exposure to direct heat or sunlight could reduce product life. Keep containers sealed when not in use.

For more detailed information please refer to the material safety data sheet.

### **Packing**

PowerSorb™ 1130 is supplied in net weight 25Kg Fiber Drum with PE liner.

### **Note**

All information in the leaflet is based on our present knowledge and experience. We reserve the right to make any changes according to technological progress or further developments. Performance of the product described herein should be verified by testing.

We specifically disclaim any other express or implied warranty of fitness for a particular purpose or merchantability.

We disclaim liability for any incidental or consequential damages.