

PowerStab™ 3853PP5 HALS UV Stabilizers


Introduction PowerStab™ 3853PP5 is a 50% active concentrate of the hindered amine light stabilizer (HALS) PowerStab™3853 in a polypropylene carrier resin.

Chemical Name Fatty acids, C12-21 and C18-unsaturated,2,2,6,6-tetramethyl-4-piperidinyl esters, Polypropylene

CAS Number 167078-06-0, 9003-07-0

EINECS Number 605-462-2, 618-352-4

Chemical Structure

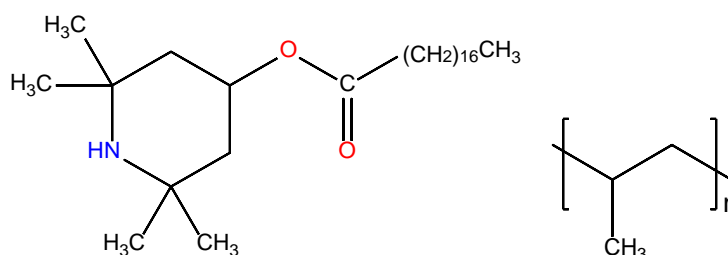

Physical Properties

Appearance	White Crystalline Granular
Melting Point (°C)	Min.28
Saponification value [%., Mg KOH/g]	128-137
Volatile (%)	Max.0.5
Color of Solution 425nm (%)	Min.75
Color of Solution 500nm (%)	Min.85
Ash (%)	Max.0.1
Purity (%)	47.5-52.5

Benefits & Applications

PowerStab™ 3853PP5 is particularly suited for use in PP film/tape/injection molding applications and in TPO.

End use applications for which this product is ideal include PP and TPO automotive exterior/interior parts, TPO roofing membranes, and PP outdoor furniture.

PowerStab™ 3853PP5 HALS UV Stabilizers

Handling & Storage

In accordance with good industrial practice, handle with care and avoid unnecessary personal contact. Avoid continuous or repetitive breathing of dust. Use only with adequate ventilation. Protect skin. Avoid dust formation and ignition sources.

This product may be stored up to one year in a sealed container. Containers should be stored in a cool, dry area. Extended storage at elevated temperatures or exposure to direct heat or sunlight could reduce product life. Keep containers sealed when not in use.

For more detailed information please refer to the material safety data sheet.

Packing

PowerStab™ 3853PP5 is supplied in 25kg drum.

Note

All information in the leaflet is based on our present knowledge and experience. We reserve the right to make any changes according to technological progress or further developments. Performance of the product described herein should be verified by testing.

We specifically disclaim any other express or implied warranty of fitness for a particular purpose or merchantability.

We disclaim liability for any incidental or consequential damages.